


Problem 2

A 2500 pound car is traveling 40 feet per second. The car's tires have a coefficient of friction with the road of .9.

- If the car is maintaining a constant speed, what is the minimum radius of curvature before slipping?
- Assuming the car is speeding up at a rate of 10 ft/s^2 , what is the minimum radius of curvature before slipping?

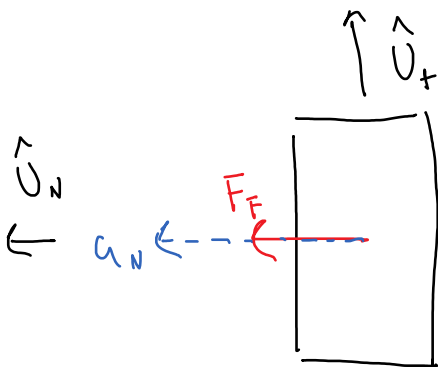


$$\sum F_z = F_g - F_N = 0$$

$$F_g = F_N = 2500 \text{ lbs}$$

$$\sum F_N = F_F = m a_N$$

$$(.9)(2500 \text{ lbs}) = \left(\frac{2500}{32.2} \right) \left(\frac{(40 \text{ ft/s})^2}{e} \right)$$

$$e = 55.2 \text{ ft}$$

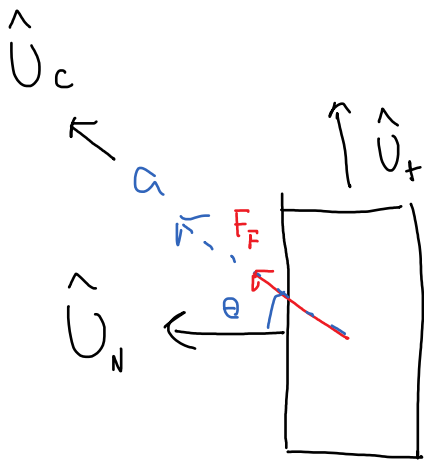

$$\sum F_t = F_F \sin \theta = m a_t$$

$$\sum F_N = F_F \cos \theta = m a_N$$

$$\sum F_c = F_F = m a_c$$

$$(0.9)(2500) = \left(\frac{2500}{32.2} \right) \sqrt{a_t^2 + a_N^2}$$

$$(0.9) = \frac{1}{32.2} \sqrt{10^2 + \left(\frac{40^2}{e} \right)^2}$$

$$(28.98)^2 = 100 + \frac{2.56 \times 10^6}{e^2}$$

$$\boxed{e = 58.8 \text{ ft}}$$